Square and Round Beveled Trims for 4" Element

E4_B_ 1.1
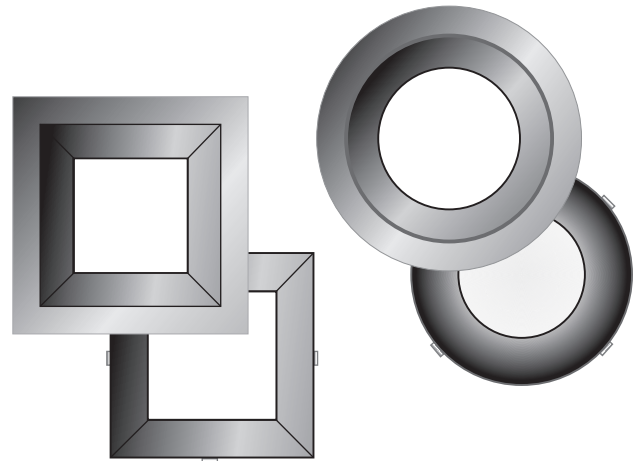
TECH LIGHTING®

ELEMENT

GENERAL PRODUCT INFORMATION:

This product is suitable for indoor locations.

c ETL us
LISTED
Intertek

SAVE THESE INSTRUCTIONS!

Preparation for Installation

1A | PRE-INSTALLED LARGE SPRING CONNECTOR | SMALL SPRING CONNECTOR

LARGE SPRING CONNECTOR

SMALL SPRING CONNECTOR

COLLAR

1/2" to 3/4" CEILING

TRIM

COLLAR
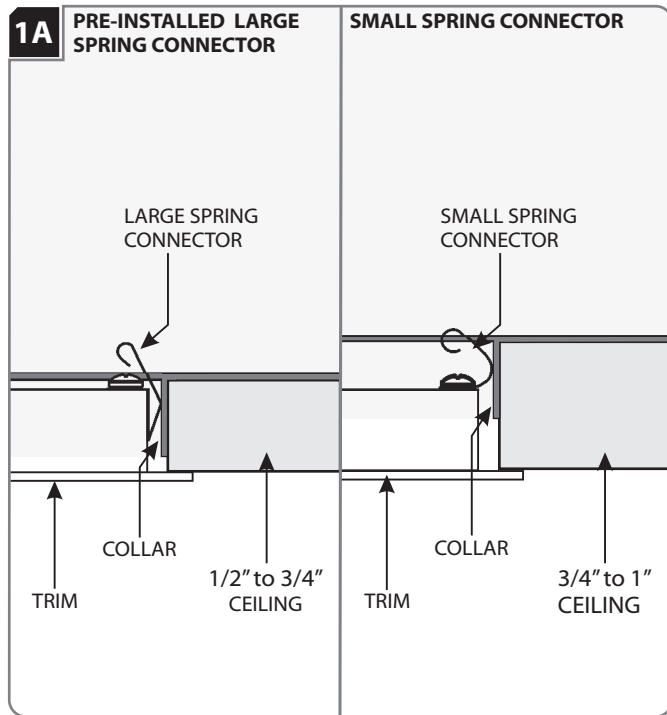
3/4" to 1" CEILING
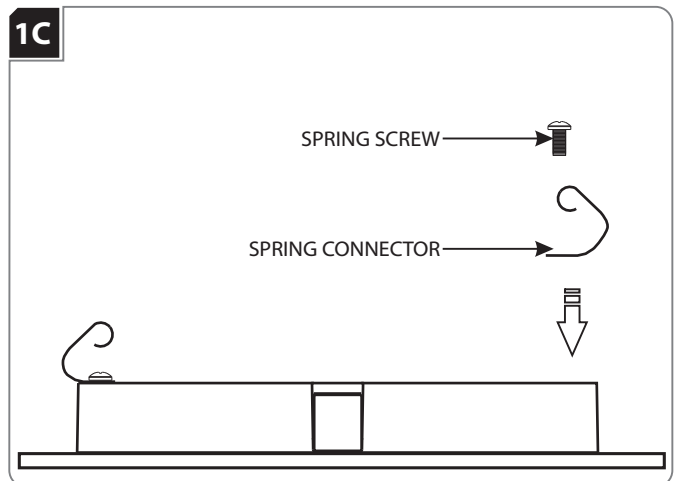
TRIM

1 ▸ The pre-installed springs are intended for ceiling thicknesses from 1/2" to 3/4". Skip to section 2A if the ceiling thickness is 1/2" to 3/4".

2 ▸ For ceiling thicknesses from 3/4" to 1", follow the rest of this section to replace the trim springs.
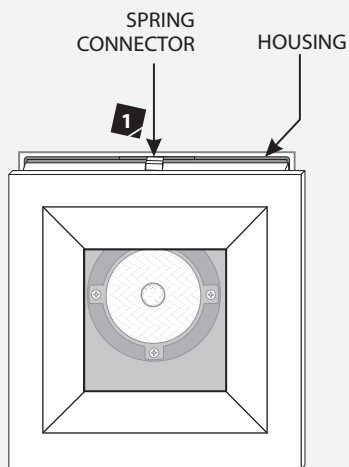
1B

SPRING SCREW ➡

PRE-INSTALLED SPRING CONNECTOR ➡
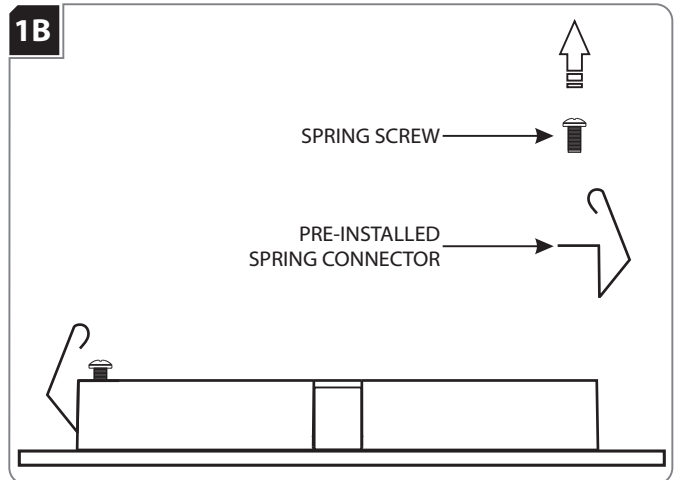
3 ▸ Replace the pre-installed spring connectors by removing the spring screws.

1C

SPRING SCREW ➡

SPRING CONNECTOR ➡

4 ▸ Install the small spring connectors and secure them by reinstalling the spring screws.
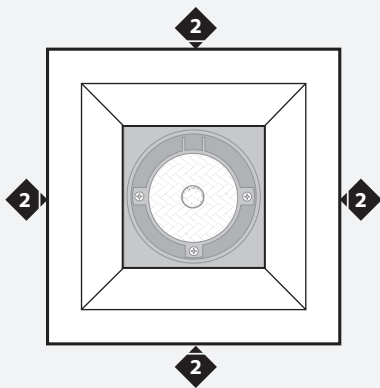
Install the Trim

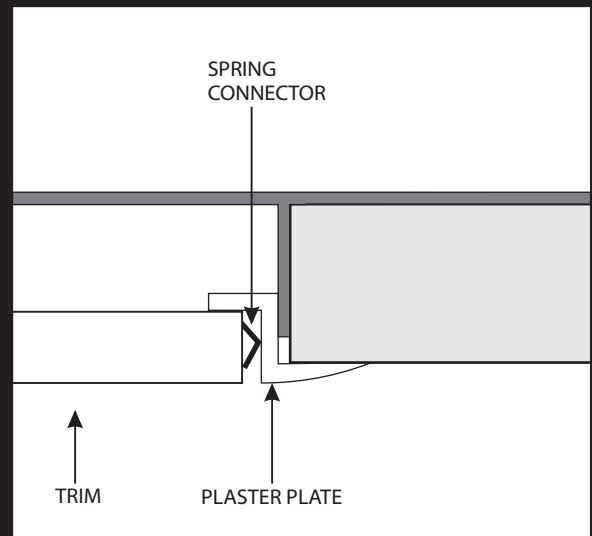## 2A

SPRING CONNECTOR   HOUSING

1 ▶ Align the trim spring connectors with the inner edge of the housing.

2B

2 ▶ Gently push the trim into the housing so that the four spring connectors snap into place.

NOTE: For flangeless trims, the spring connectors on the trim snap into the plaster plate.

SPRING CONNECTOR

TRIM   PLASTER PLATE

⅂ℓ TECH LIGHTING®

VISUAL COMFORT & CO.