

# VERSE™ 3" LED

## FIXED AND WALL WASH DOWNLIGHTS

The VERSE 3" LED Fixed and Wall Wash Downlights offer a cost-effective alternative for residential, multifamily and hospitality applications without sacrificing aesthetics or quality. VERSE is IC-rated and provides a minimal profile without the need for a large housing. The LED subassembly and driver ship integrated with the housing which eliminates a second wiring step after the ceiling is installed.

- 950 lumens
- 2700K and 3000K; 90+ CRI
- Easy installation
- Light source is integrated as part of the housing
- One housing for round and square trim options
- 4.2" tall housing fits into shallow plenums
- Collar notches assist in the alignment of multiple housings
- By removing the LED module, the housing can be used as a standard junction box for pendants or other light fixtures
- IC-rated, airtight, wet-rated, certified for UL 514A standards, code compliant for use in fire-rated assemblies up to a maximum of 2 hours per International Building Code Section 714
- Patent pending



FIXED



WALL WASH

### SPECIFICATIONS

	FIXED		WALL WASH	
	2700K	3000K	2700K	3000K
DELIVERED LUMENS	903	950	713	750
WATTS	9W			
EFFICACY	100	106	79	83
CRI	90+			
COLOR CONSISTENCY	3-step			
INPUT VOLTAGE	120V			
DIMMING <sup>1</sup>	Reverse phase, Forward phase, and Triac dimming down to 2% to 4% with several dimmers			
POWER SUPPLY	Constant current driver with .99 power factor and +80% efficiency			
OPTICS	Diffused lens provides 85° beam spread		Asymmetric Wall Wash	
CEILING APPEARANCE	Flanged up to 3/4" ceiling thickness			
CEILING APERTURE	4" ceiling cutout   2" aperture			
HOUSING	IC Airtight; suitable up to R60 spray foam insulation			
CONSTRUCTION	Housing: Galvanized Steel Trims: Die-Cast Aluminum			
FINISH	White (field paintable)			
GENERAL LISTINGS	ETL listed. Wet-rated. Code compliant for use in fire-rated assemblies up to a maximum of 2 hours.			
CALIFORNIA TITLE 24	Registered CEC Appliance Database. Complies with CEC 2019 Title 24 Part 6 (JA8-2016, JA8-2019).			
L70	50,000 hours min			
WARRANTY <sup>2</sup>	5 years			

Ordering grids available on page 2.

<sup>1</sup>See [visualcomfort.com](http://visualcomfort.com) for dimmer compatibility.

<sup>2</sup>Visit [visualcomfort.com](http://visualcomfort.com) for specific warranty limitations and details.



©2023 Visual Comfort & Co. All rights reserved. The Visual Comfort & Co. logo is a registered trademark. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification.

UPDATED 6/15/23

# VERSE™ 3" LED

## FIXED AND WALL WASH DOWNLIGHTS

### ORDERING INFORMATION

#### HOUSING

ITEM NUMBER	DESCRIPTION
V3R27	VERSE 3" NEW CONSTRUCTION   2700K
V3R30	VERSE 3" NEW CONSTRUCTION   3000K

Trims are required and must be ordered separately.  
 All housings are IC-rated, airtight, fire-rated, and wet-rated.  
 All modules are 120V.


#### TRIM

ITEM NUMBER	DESCRIPTION
V3RDWH	VERSE 3"   ROUND   FIXED
V3RWWH	VERSE 3"   ROUND   WALL WASH
V3SDWH	VERSE 3"   SQUARE   FIXED
V3SWWH	VERSE 3"   SQUARE   WALL WASH

All trims are flanged white.


### TRIMS

#### FIXED




SQUARE FLANGED


#### WALL WASH



SQUARE FLANGED




ROUND FLANGED



ROUND FLANGED

### HOUSING

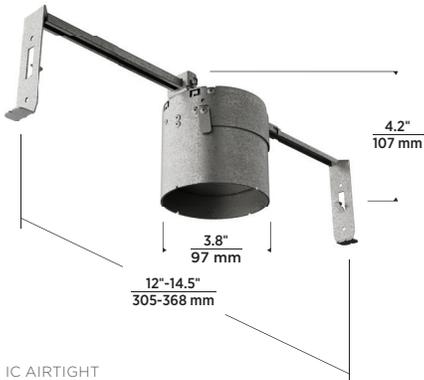

IC AIRTIGHT

Must be installed in a joist ceiling. Not compatible with grid ceilings.

# VERSE™ 3" LED

## FIXED AND WALL WASH DOWNLIGHTS

### PHOTOMETRICS

Description: 3" LED Downlight  
3000K

Model: Verse 9W Fixed

Input Power (Watts): 8.85

Input Power Factor: 0.99

Absolute Luminous Flux (Lumens): 936

Lumen Efficacy (Lumens per Watt): 105.7

ANGLE	0°	45°	90°
0°	509	509	509
5°	505	507	507
10°	501	503	501
15°	492	491	487
20°	475	470	465
25°	449	441	433
30°	413	402	394
35°	367	355	346
40°	312	300	291
45°	255	242	233
50°	190	177	168
55°	126	117	111
60°	79	72	69
65°	46	42	41
70°	25	22	22
75°	12	10	10
80°	5	4	4
85°	2	2	2
90°	0	0	0

