

VISUAL COMFORT AND COMPANY TEST REPORT

SCOPE OF WORK

Performance Testing for Luminaires

MODEL NUMBER

E3SRF-LO9354A w/ E3SLB-OW

PROJECT NUMBER

G104622548

REPORT NUMBER

104622548CRT-010

ISSUE DATE

9/21/2021

REVISED DATE

None

TEST DATES

9/18/21 through 9/21/21

DOCUMENT CONTROL NUMBER

RTTDS-R-AMER-Test-3407

© 2017 INTERTEK



REPORT NUMBER

104622548CRT-010

MODEL NUMBER(s)

E3SRF-LO9354A w/ E3SLB-OW

REPORT RENDERED TO:

VISUAL COMFORT AND COMPANY
7400 LINDER AVE
SKOKIE, IL 60077
USA

STATEMENT OF LIMITATION

NVLAP Lab Code 100402-0. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

AUTHORIZATION

The testing performed was authorized by signed quote number Qu-01154433-0.

TEST STANDARDS

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting
ANSI NEMA ANSLG C78.377: 2017: Specifications of the Chromaticity of Solid State Lighting Products

In Charge of Testing:



Gerald Gray
Associate Engineer
Lighting Division

Reviewer:



Kristie Ray
Team Lead, Engineering
Lighting Division

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

SAMPLE INFORMATION

REPORT NO. 104622548CRT-010


ITEMS RECEIVED

Item No.	Control No.	Model No.	Description	Type	Received
1	CRT2109100744-001-1	--	Housing w/PTB15W-0300-38-VCC	Production	9/10/2021
2	CRT2109100744-001-5	--	40° Lens	Production	9/10/2021
3	CRT2109100744-001-15	--	3500K LED	Production	9/10/2021
4	CRT2109100744-001-19	--	Trim with Lens	Production	9/10/2021

TESTED SAMPLE CONFIGURATIONS

Config No.	Tested Model No.	Item Nos. Utilized
1	E3SRF-LO9354A w/ E3SLB-OW	1,2,3,4

SAMPLE PHOTOS - TESTED CONFIGURATIONS

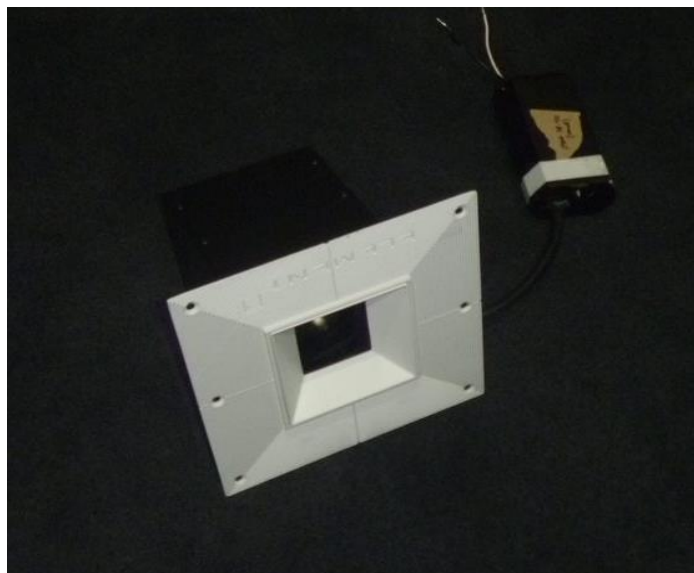

SUMMARY

REPORT NO. 104622548CRT-010

PRODUCT INFORMATION AND SUMMARY OF DATA

Product Model No.:	E3SRF-LO9354A w/ E3SLB-OW
Product Description:	E3 IC REMODEL-935-40DEG-NO LENS
LED Model No.:	Bridgelux® Gen 8 V10 Array Series
Driver Model No.:	PTB15W-0300-38-VCC
Light Source:	LED
CEC Product Type:	Inseparable

Criteria	Results
Light Output (lumens)	846.9
Input Power (W)	10.94
Lumen Efficacy (lm/W)	77.4
Input Power Factor ()	0.987
Correlated Color Temperature (K)	3448
Color Rendering Index - Ra ()	93.8
Color Rendering Index - R9 ()	80.3
Duv ()	-0.0021
Chromaticity Coordinate (x)	0.406
Chromaticity Coordinate (y)	0.386
Chromaticity Coordinate (u')	0.238
Chromaticity Coordinate (v')	0.510

SEASONING IN SAMPLE ORIENTATION - LED PRODUCTS

No seasoning was performed in accordance with IESNA LM-79.

INTEGRATING SPHERE TESTING

A spectroradiometer and integrating sphere were used to measure the spectral distribution for each EUT resulting in photometric and colorimetric data. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position inside the sphere and stabilization procedures to LM-79 were followed.

TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

A Type C Mirror Goniophotometer system was used to measure the luminous intensity (candela) at each angle of distribution for the EUT. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position near the EUT at equal height and stabilization procedures to LM-79 were followed.

TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

REPORT NO. 104622548CRT-010

Test Configuration	Tested Model No.	Pass/Fail/NA
1	E3SRF-LO9354A w/ E3SLB-OW	NA

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)


Base Orientation	Input Voltage (Vac)	Input Current (mA)	Input Power (W)	Input Power Factor ()
Up	120.03	91.8	10.89	0.989

Light Output (lm)	Lumen Efficacy (lm/W)
837.4	76.9

INTENSITY SUMMARY - CANDELA

Angle	0	22.5	45	67.5	90
0	1704	1704	1704	1704	1704
5	1653	1652	1650	1649	1644
10	1517	1513	1506	1506	1494
15	1299	1295	1284	1279	1263
20	999	985	986	957	943
25	564	601	642	574	532
30	252	282	331	265	233
35	81	103	118	93	75
40	25	32	47	31	24
45	6	8	14	8	6
50	0	0	1	0	0
55	0	0	0	0	0
60	0	0	0	0	0
65	0	0	0	0	0
70	0	0	0	0	0
75	0	0	0	0	0
80	0	0	0	0	0
85	0	0	0	0	0
90	0	0	0	0	0
95	0	0	0	0	0
100	0	0	0	0	0
105	0	0	0	0	0
110	0	0	0	0	0
115	0	0	0	0	0
120	0	0	0	0	0
125	0	0	0	0	0
130	0	0	0	0	0
135	0	0	0	0	0
140	0	0	0	0	0
145	0	0	0	0	0
150	0	0	0	0	0
155	0	0	0	0	0
160	0	0	0	0	0
165	0	0	0	0	0
170	0	0	0	0	0
175	0	0	0	0	0
180	0	0	0	0	0

Entire luminous intensity matrix found in .IES file

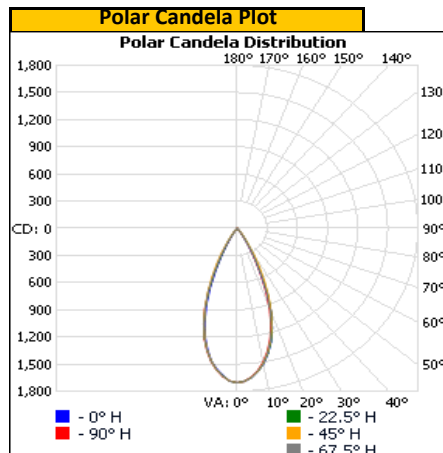



REPORT NO. 104622548CRT-010

ORIENTATION AND ALIGNMENT OF EUT

Luminous Opening		
Length (ft)	Width (ft)	Height (ft)
0.29	0.29	0.00
0°-180° H	90°-270° H	0°-180° V


Test Distance (ft)
29.6

PHOTOMETRIC CENTER OF EUT

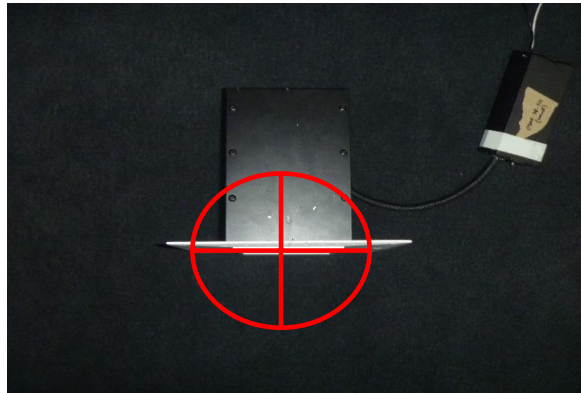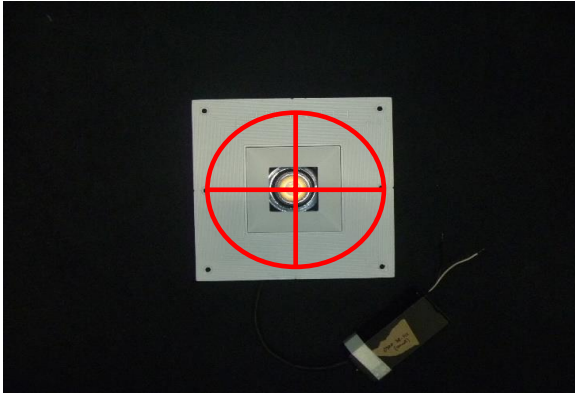

REPORT NO. 104622548CRT-010

ILLUMINANCE SUMMARY

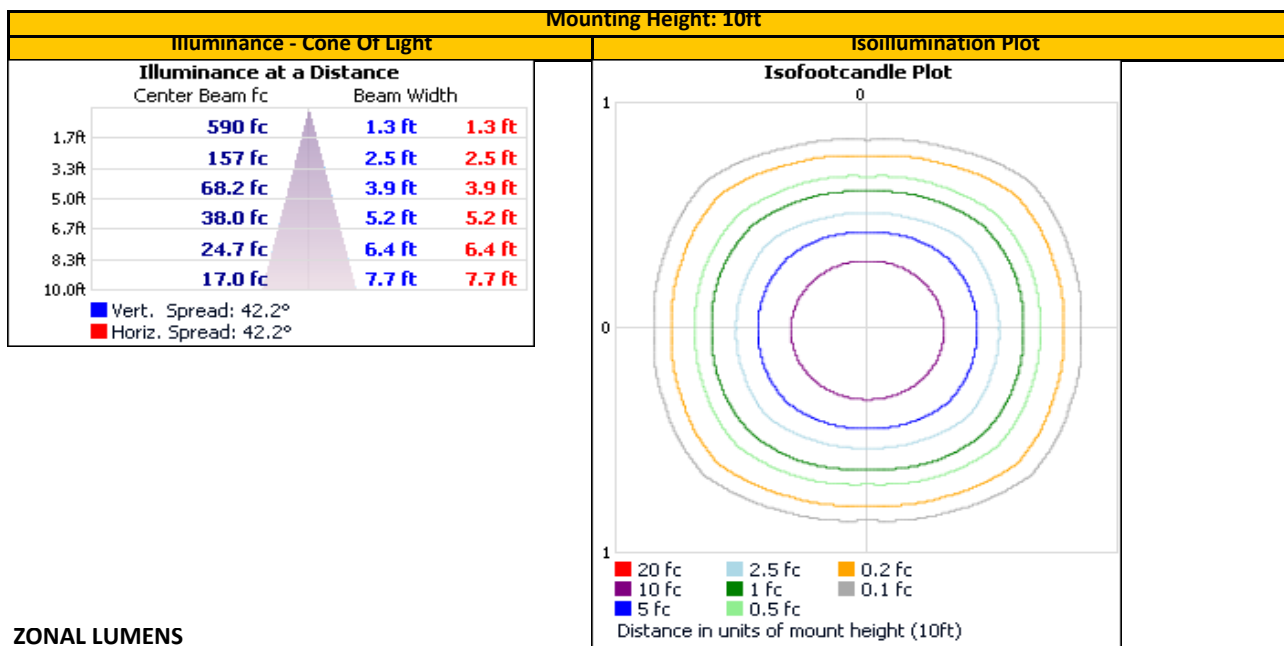

ZONAL LUMENS

Zonal Lumen Summary								
Zone			Zone					
Zone	Lumens	% Lum	Zone	Lumens	% Total	% Total		
0-30	759.4	90.7%	0-10	152.1	18.2%	90-100	0.0	0.0%
0-40	829.0	99.0%	10-20	346.1	41.3%	100-110	0.0	0.0%
0-60	837.4	100.0%	20-30	261.3	31.2%	110-120	0.0	0.0%
60-90	0.0	0.0%	30-40	69.6	8.3%	120-130	0.0	0.0%
70-100	0.0	0.0%	40-50	8.4	1.0%	130-140	0.0	0.0%
90-120	0.0	0.0%	50-60	0.0	0.0%	140-150	0.0	0.0%
0-90	837.4	100.0%	60-70	0.0	0.0%	150-160	0.0	0.0%
90-180	0.0	0.0%	70-80	0.0	0.0%	160-170	0.0	0.0%
0-180	837.4	100.0%	80-90	0.0	0.0%	170-180	0.0	0.0%

INTEGRATING SPHERE TESTING

REPORT NO. 104622548CRT-010

Test Configuration	Tested Model No.	Pass/Fail/NA
1	E3SRF-LO9354A w/ E3SLB-OW	NA


PHOTOMETRIC, COLORIMETRIC, AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)

Base Orientation
Select One

Input Voltage (Vac)	Input Current (mA)	Input Power (W)	Input Power Factor ()	Input ATHD (%)
120.02	92.4	10.94	0.987	11.25
277.01	44.0	10.99	0.901	15.22

Light Output (lm)	Lumen Efficacy (lm/W)	CCT (K)	CRI - Ra ()	CRI - R9 ()
846.9	77.4	3448	93.8	80.3


Duv ()	1931 Chrom (x)	1931 Chrom (y)	1976 Chrom (u')	1976 Chrom (v')
-0.0021	0.406	0.386	0.238	0.510

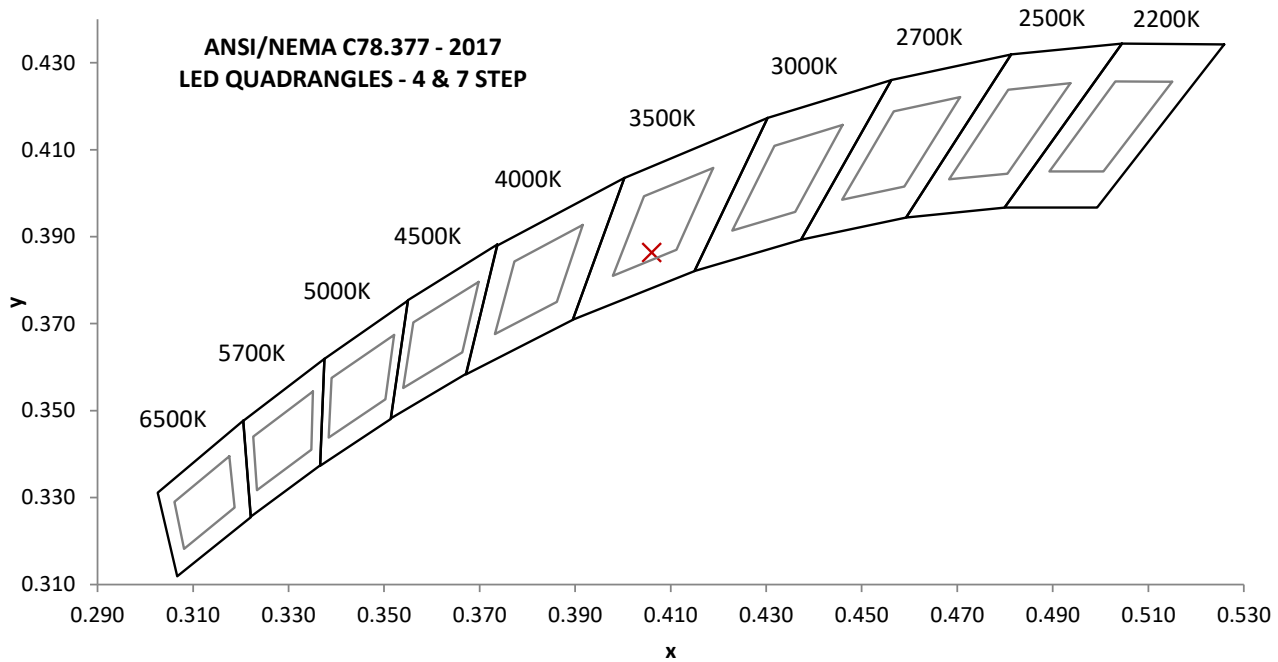

REPORT NO. 104622548CRT-010

SPECTRAL DISTRIBUTION OVER WAVELENGTHS

nm	mW/nm	nm	mW/nm	nm	mW/nm	nm	mW/nm
350	0.2	460	8.2	570	12.4	680	9.0
355	0.2	465	6.3	575	12.5	685	8.1
360	0.2	470	5.0	580	12.6	690	7.3
365	0.2	475	4.0	585	12.8	695	6.5
370	0.1	480	3.8	590	13.1	700	5.7
375	0.1	485	4.1	595	13.4	705	5.0
380	0.1	490	4.7	600	13.8	710	4.4
385	0.1	495	5.6	605	14.2	715	3.9
390	0.1	500	6.6	610	14.7	720	3.4
395	0.2	505	7.5	615	15.0	725	3.0
400	0.2	510	8.3	620	15.3	730	2.6
405	0.2	515	9.0	625	15.4	735	2.2
410	0.3	520	9.5	630	15.5	740	1.9
415	0.5	525	10.0	635	15.3	745	1.7
420	0.9	530	10.5	640	15.1	750	1.4
425	1.5	535	10.9	645	14.7	755	1.2
430	2.4	540	11.3	650	14.1	760	1.1
435	3.8	545	11.5	655	13.3	765	0.9
440	5.9	550	11.8	660	12.5	770	0.8
445	9.2	555	12.0	665	11.7	775	0.7
450	12.8	560	12.1	670	10.8	780	0.6
455	11.5	565	12.3	675	9.9	---	---

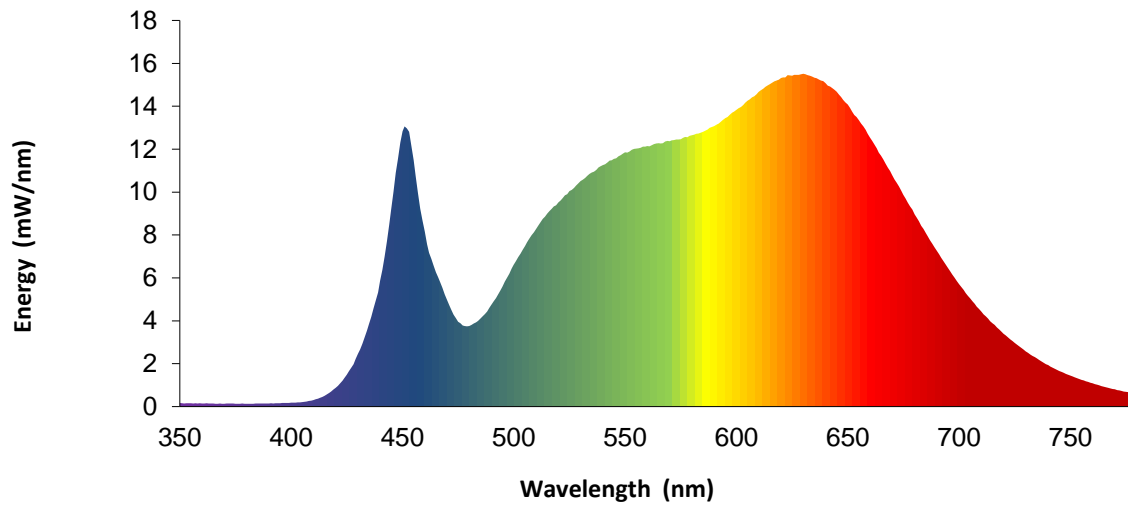

Portrayed color in graphic is estimated by wavelength (nm) and may not be exact - it is a visual representation only

REPORT NO. 104622548CRT-010







ANSI/IES TM-30-18 Color Rendition Report

Source: LED

Manufacturer: VISUAL COMFORT AND COMPANY

Date: 9/21/2021

Model: E3SRF-L09354A w/ E3SLB-OW

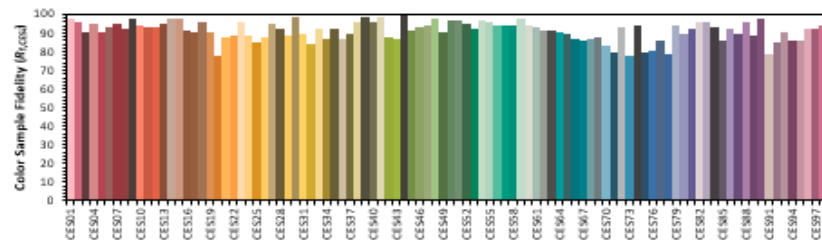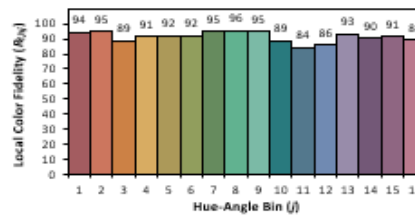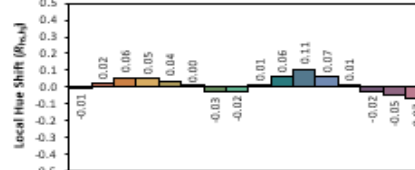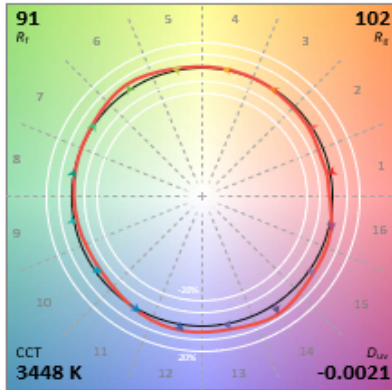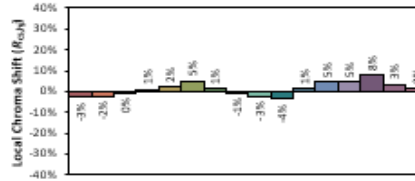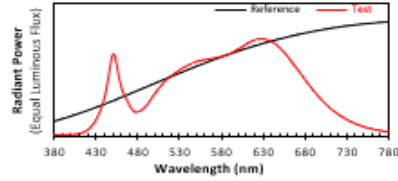

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x **0.4060**
 y **0.3863**
 z **0.2380**
 x' **0.5095**

CIE 13.3-1995
(CRI)

R_a 94
 R_g 80

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.

EQUIPMENT LIST

REPORT NO. 104622548CRT-010

#	Equipment	Model No	Control No.	Last Cal	Cal Due
1	Elgar AC Power Supply	CW1251	---	VBV	VBV
2	Sorenson DC Power Supply	XFR 150-8	---	VBV	VBV
3	Traceable Hygrothermometer	4800	L206	2/12/2021	2/12/2022
4	Yokogawa Power Analyzer	WT1600	E474	6/15/2021	6/15/2022
5	Fluke Thermometer	53 II	D587	2/5/2021	2/5/2022
6	3M Integrating Sphere Spectrometer System	CDS 2600	---	9/3/2021	12/3/2021
7	Fisher Scientific Stopwatch	14-649-9	N1132	3/26/2021	3/26/2022
8	LSI High Speed Mirror Goniophotometer	6440	---	8/16/2021	11/16/2021
9	Elgar AC Power Supply	CW1251	---	VBV	VBV
10	Yokogawa Power Analyzer	WT210	E464	5/11/2021	5/11/2022
11	Traceable Hygrothermometer	4800	L204	2/21/2021	2/21/2022
12	Sorenson DC Power Supply	XG 150-10	---	VBV	VBV
13	Omega Thermometer	DPI8-C24	M263	3/23/2021	3/23/2022
14	Bosch Distance Laser	Pro GLM 20	L211	3/3/2021	3/3/2022
15	M-D Building Products Digital Level	Smart Tool	L112	5/26/2021	5/26/2022
16	Tape Measure	Powerlock	N1342	3/11/2019	3/11/2022

REVISION HISTORY

#	Revision Date	Updated By	Reviewed By	Description of Change
---	None	---	---	---
---	---	---	---	---
---	---	---	---	---