

VISUAL COMFORT & CO. TEST REPORT

SCOPE OF WORK

Electrical and Photometric tests as required to the IESNA test standard.

MODEL NUMBER

E4PSLRD-8308-W

REPORT NUMBER

104206403CHI-109D

ISSUE DATE

August 14, 2020

REVISION DATE

None

DOCUMENT CONTROL NUMBER

TBD

© 2017 INTERTEK



REPORT NO.: 104206403CHI-109D

REPORT DATE: August 14, 2020

TEST REPORT

TEST OF ONE E4PSL 85DEG 300MA

MODEL NO. E4PSLRD-8308-W
LED MODEL NO. BRIDGELUX BXRE-**E2000-C-83
DRIVER MODEL NO. ERP 255ESS015W300

RENDERED TO:

VISUAL COMFORT & CO.
7400 LINDER AVE.
SKOKIE IL 60077

STATEMENT OF LIMITATIONS

NVLAP Lab Code 600186-0. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

AUTHORIZATION

The testing performed was authorized by signed quote number Qu-01080748-1.

STANDARDS USED

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

DESCRIPTION OF SAMPLE

The client submitted one production sample of model number E4PSLRD-8308-W. The sample was received by Intertek on July 13, 2020 in undamaged condition and one sample was tested as received. The sample designation was AH07132020091733.

DATE OF TESTS

August 5, 2020.

REPORT NO.: 104206403CHI-109D

REPORT DATE: August 14, 2020

TEST REPORT

SUMMARY

MODEL NO:	E4PSLRD-8308-W
DESCRIPTION:	E4PSL 85deg 300mA

CRITERIA	RESULTS
Lumen Output (lumens)	1183.2
Input Power (W) @ 120 (VAC)	11.55
Lumen Efficacy (lm/W)	102.4
Input Power Factor () @ 120 (VAC)	0.983

EQUIPMENT LIST

EQUIPMENT USED	MODEL NO.	CONTROL NO.	LAST CAL DATE	CAL DUE DATE
Yokogawa Power Meter	WT210	146919	7/1/2020	7/1/2021
Omega Thermometer	DPI8-C24	146920	10/3/2019	10/3/2020
LSI High Speed Mirror Goniometer	6440T	146928	VBV	VBV
Newport Thermohygrometer	iServer	146957	12/2/2019	12/2/2020
Pacific, AC Power Supply	118-ACX	CHI0153	VBV	VBV

REPORT NO.: 104206403CHI-109D

REPORT DATE: August 14, 2020

TEST REPORT

TEST METHODS

SEASONING IN SAMPLE ORIENTATION - LED PRODUCTS

No seasoning was performed in accordance with IESNA LM-79.

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD

A Type C Mirror Goniometer was used to measure the intensity (candelas) at each angle of distribution for the SSL sample.

Ambient temperature was measured equal to the height of the sample mounted on the goniometer equipment. The SSL sample was operated on the client provided driver at rated input volts in its designated orientation. The SSL sample was allowed to stabilize for at least thirty minutes before measurements were made. Stabilization procedures to LM-79 were followed. Electrical measurements including voltage, current, and power were measured using a power analyzer.

REPORT NO.: 104206403CHI-109D

REPORT DATE: August 14, 2020

TEST REPORT


RESULTS OF TESTS

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

INTERTEK CONTROL NO.	BASE POSITION	INPUT VOLTAGE (VAC)	INPUT CURRENT (mA)	INPUT POWER (W)	INPUT POWER FACTOR ()	LIGHT OUTPUT (lm)	LUMEN EFFICACY (lm/W)
AH07132020091733	Base Up	120.1	97.9	11.55	0.983	1183.2	102.4

INTENSITY SUMMARY - CANDELAS

Angle	0	22.5	45	67.5	90
0	669	669	669	669	669
5	668	668	668	667	667
10	663	662	662	662	662
15	645	644	645	644	644
20	615	614	614	612	611
25	570	568	570	564	562
30	508	507	512	501	496
35	429	430	440	423	412
40	338	342	360	336	321
45	255	262	281	257	242
50	190	195	212	192	179
55	137	140	152	138	128
60	93	94	102	92	86
65	58	58	62	57	54
70	35	33	34	33	32
75	19	18	18	18	16
80	10	9	9	9	9
85	5	4	4	4	4
90	0	0	0	0	0

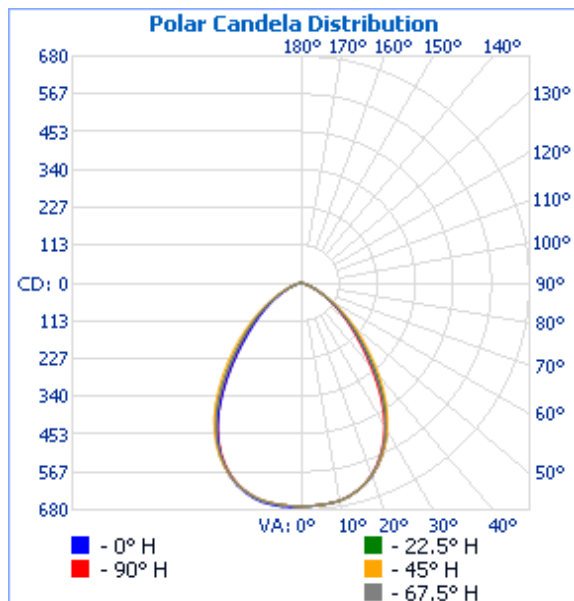

REPORT NO.: 104206403CHI-109D



REPORT DATE: August 14, 2020

TEST REPORT

RESULTS OF TESTS

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

MOUNTING HEIGHT: 10ft	
ILLUMINANCE - CONE OF LIGHT	ISOILLUMINATION PLOT

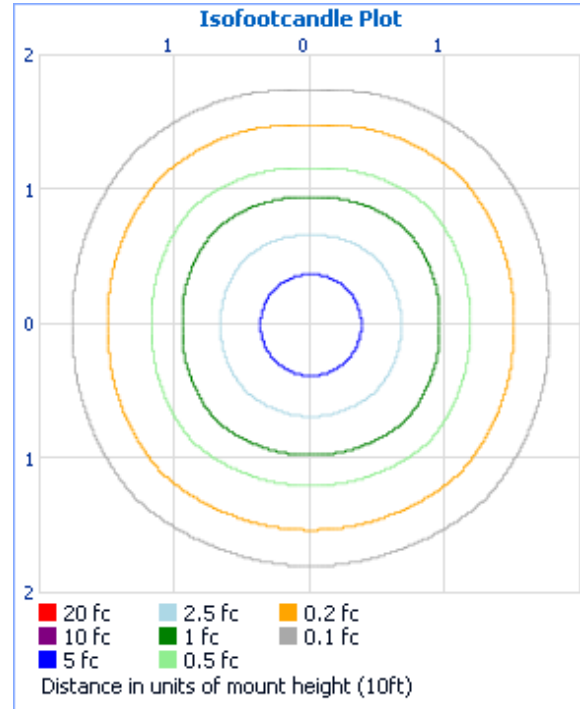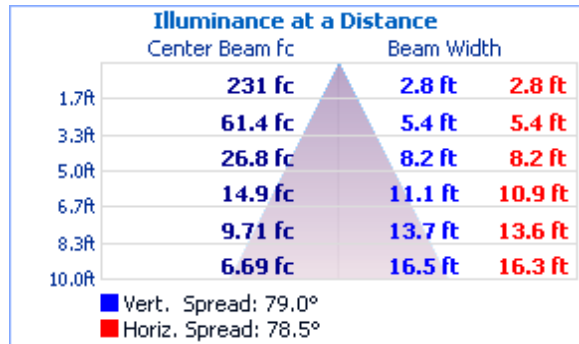

ZONAL LUMEN SUMMARY AND PERCENTAGES




ZONE	LUMENS	% LUMINAIRE
0-30	504.7	42.7
0-40	770.3	65.1
0-60	1099.4	92.9
60-90	83.9	7.1
70-100	24.7	2.1
90-120	0.0	0.0
0-90	1183.2	100.0
90-180	0.0	0.0
0-180	1183.2	100.0

ZONE	LUMENS	% LUMINAIRE
0-10	63.6	5.4
10-20	181.3	15.3
20-30	259.9	22.0
30-40	265.6	22.4
40-50	202.7	17.1
50-60	126.3	10.7
60-70	59.2	5.0
70-80	19.9	1.7
80-90	4.8	0.4

REPORT NO.: 104206403CHI-109D
REPORT DATE: August 14, 2020

TEST REPORT

PICTURES

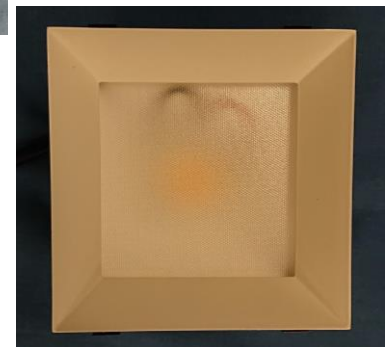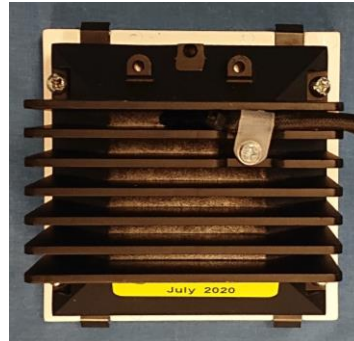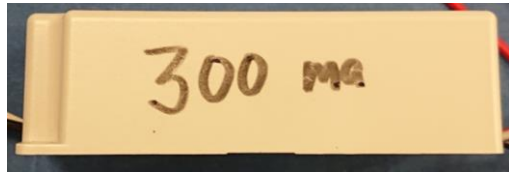

CONCLUSION

The results tabulated in this report are representative of the actual test samples submitted for this report only. The data is provided to the client for further evaluation. Compliance to the referenced specification requirements was not determined in this report.

In Charge Of Tests:

Ian Smith

Ian Smith
Engineer
Lighting Division

Report Reviewed By:

Jeffrey Davis

Jeff Davis
N.A. Technical Lead
Lighting Division

Attachments: IES File

REVISION HISTORY

JOB NUMBER	DATE OF REVISION	PROJECT HANDLER	REVIEWED BY	REVISION NOTE
None				