

# VISUAL COMFORT & CO. TEST REPORT

## SCOPE OF WORK

Electrical and Photometric tests as required to the IESNA test standard.

## MODEL NUMBER

E4PSLRD-8308-W

## REPORT NUMBER

104206403CHI-111D

## ISSUE DATE

August 14, 2020

## REVISION DATE

None

## DOCUMENT CONTROL NUMBER

TBD

© 2017 INTERTEK



**REPORT NO.: 104206403CHI-111D**

**REPORT DATE: August 14, 2020**

**TEST REPORT**

TEST OF ONE E4PSL 85DEG 500MA

MODEL NO. E4PSLRD-8308-W  
LED MODEL NO. BRIDGELUX BXRE-\*\*E2000-C-83  
DRIVER MODEL NO. ERP 255ESS030W500

RENDERED TO:

VISUAL COMFORT & CO.  
7400 LINDER AVE.  
SKOKIE IL 60077

**STATEMENT OF LIMITATIONS**

NVLAP Lab Code 600186-0. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

**AUTHORIZATION**

The testing performed was authorized by signed quote number Qu-01080748-1.

**STANDARDS USED**

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

**DESCRIPTION OF SAMPLE**

The client submitted one production sample of model number E4PSLRD-8308-W. The sample was received by Intertek on July 13, 2020 in undamaged condition and one sample was tested as received. The sample designation was AH07132020091733.

**DATE OF TESTS**

August 6, 2020.

**REPORT NO.: 104206403CHI-111D**

**REPORT DATE: August 14, 2020**

**TEST REPORT**

**SUMMARY**

<b>MODEL NO:</b>	E4PSLRD-8308-W
<b>DESCRIPTION:</b>	E4PSL 85deg 500mA

CRITERIA	RESULTS
Lumen Output (lumens)	1876.2
Input Power (W) @ 120 (VAC)	19.19
Lumen Efficacy (lm/W)	97.8
Input Power Factor ( ) @ 120 (VAC)	0.988

**EQUIPMENT LIST**

EQUIPMENT USED	MODEL NO.	CONTROL NO.	LAST CAL DATE	CAL DUE DATE
Yokogawa Power Meter	WT210	146919	7/1/2020	7/1/2021
Omega Thermometer	DPI8-C24	146920	10/3/2019	10/3/2020
LSI High Speed Mirror Goniometer	6440T	146928	VBV	VBV
Newport Thermohygrometer	iServer	146957	12/2/2019	12/2/2020
Pacific, AC Power Supply	118-ACX	CHI0153	VBV	VBV

**REPORT NO.: 104206403CHI-111D**

**REPORT DATE: August 14, 2020**

**TEST REPORT**

**TEST METHODS**

**SEASONING IN SAMPLE ORIENTATION - LED PRODUCTS**

No seasoning was performed in accordance with IESNA LM-79.

**PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD**

A Type C Mirror Goniometer was used to measure the intensity (candelas) at each angle of distribution for the SSL sample.

Ambient temperature was measured equal to the height of the sample mounted on the goniometer equipment. The SSL sample was operated on the client provided driver at rated input volts in its designated orientation. The SSL sample was allowed to stabilize for at least thirty minutes before measurements were made. Stabilization procedures to LM-79 were followed. Electrical measurements including voltage, current, and power were measured using a power analyzer.

REPORT NO.: 104206403CHI-111D

REPORT DATE: August 14, 2020

TEST REPORT


RESULTS OF TESTS

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

INTERTEK CONTROL NO.	BASE POSITION	INPUT VOLTAGE (VAC)	INPUT CURRENT (mA)	INPUT POWER (W)	INPUT POWER FACTOR ( )	LIGHT OUTPUT (lm)	LUMEN EFFICACY (lm/W)
AH07132020091733	Base Up	120.0	161.8	19.19	0.988	1876.2	97.8

INTENSITY SUMMARY - CANDELAS

Angle	0	22.5	45	67.5	90
0	1060	1060	1060	1060	1060
5	1058	1057	1057	1056	1057
10	1050	1048	1048	1048	1048
15	1024	1019	1019	1018	1019
20	978	971	972	970	968
25	906	897	900	894	891
30	810	798	807	792	786
35	686	675	691	668	653
40	536	536	564	530	510
45	404	408	441	406	385
50	303	305	331	304	286
55	218	219	238	218	206
60	147	145	162	146	139
65	93	89	96	90	87
70	55	51	52	52	51
75	30	27	28	28	27
80	16	14	14	14	14
85	8	6	6	6	6
90	0	0	0	0	0

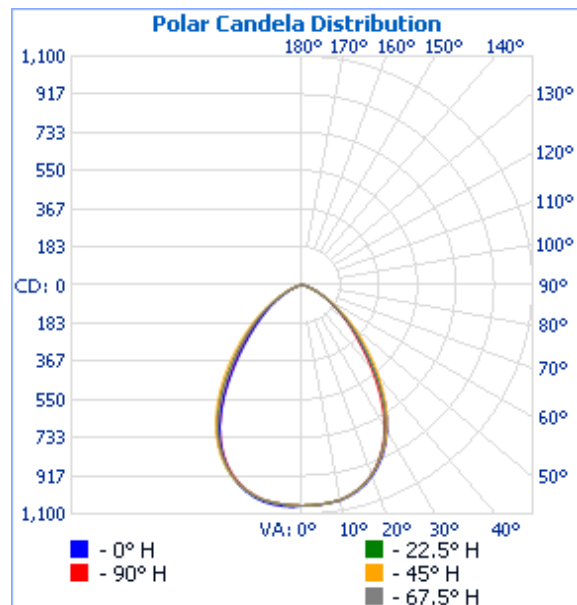

REPORT NO.: 104206403CHI-111D



REPORT DATE: August 14, 2020

TEST REPORT

RESULTS OF TESTS

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

MOUNTING HEIGHT: 10ft	
ILLUMINANCE - CONE OF LIGHT	ISOILLUMINATION PLOT

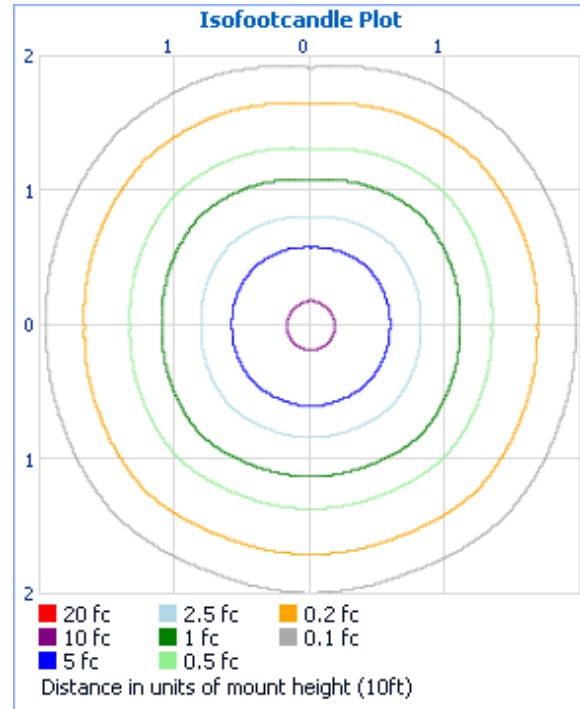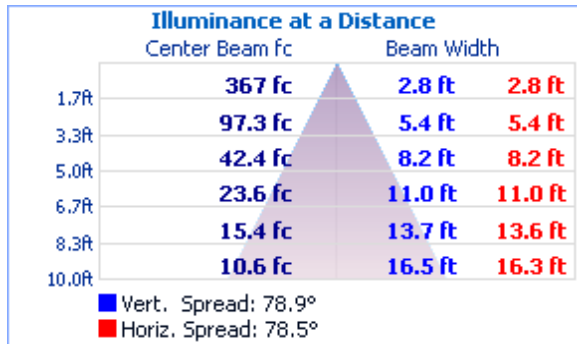

ZONAL LUMEN SUMMARY AND PERCENTAGES


ZONE	LUMENS	% LUMINAIRE
0-30	799.7	42.6
0-40	1220.5	65.0
0-60	1742.5	92.9
60-90	133.7	7.1
70-100	39.3	2.1
90-120	0.0	0.0
0-90	1876.2	100.0
90-180	0.0	0.0
0-180	1876.2	100.0

ZONE	LUMENS	% LUMINAIRE
0-10	100.7	5.4
10-20	287.2	15.3
20-30	411.9	22.0
30-40	420.7	22.4
40-50	321.4	17.1
50-60	200.6	10.7
60-70	94.4	5.0
70-80	31.8	1.7
80-90	7.6	0.4

**REPORT NO.: 104206403CHI-111D**  
**REPORT DATE: August 14, 2020**

**TEST REPORT**

**PICTURES**

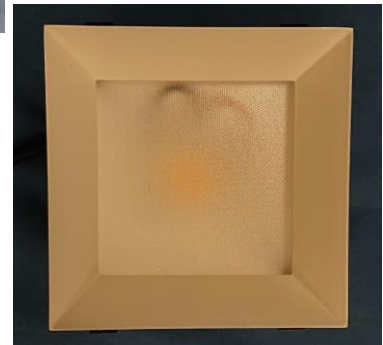

**CONCLUSION**

The results tabulated in this report are representative of the actual test samples submitted for this report only. The data is provided to the client for further evaluation. Compliance to the referenced specification requirements was not determined in this report.

In Charge Of Tests:

*Ian Smith*

Ian Smith  
Engineer  
Lighting Division

Report Reviewed By:

*Jeffrey Davis*

Jeff Davis  
N.A. Technical Lead  
Lighting Division

Attachments: IES File

**REVISION HISTORY**

JOB NUMBER	DATE OF REVISION	PROJECT HANDLER	REVIEWED BY	REVISION NOTE
None				