

# VISUAL COMFORT & Co.

Light efficiency:


121 Lumen/Watt

Output: 2397 lm

Peak: 4351 cd

Power: 19.7 W

PF: 0.99

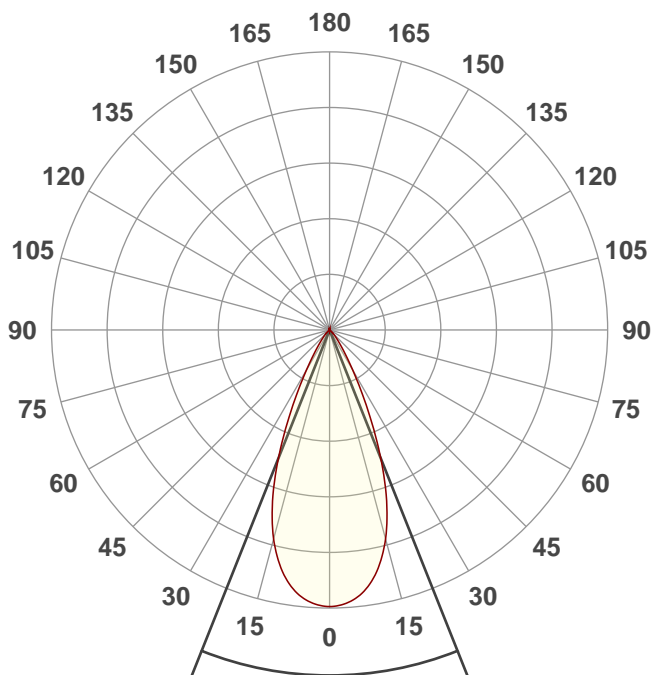

Product name:

TR1100 EC3RF-198354DN-UNV-W


Date and time:

3/28/2023 2:48:50 PM

43.5°

Beam angle

Power

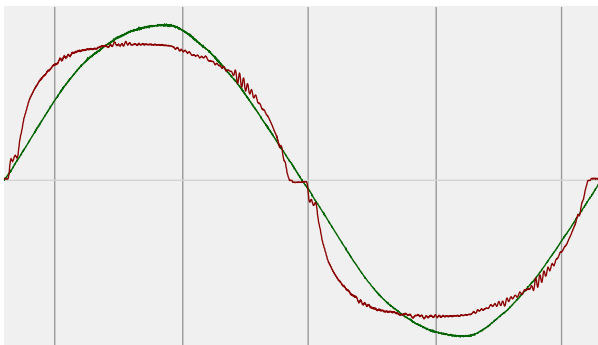


Voltage: 121 V

Current: 0.166 A

## ISO Diagrams

ISO candela diagram

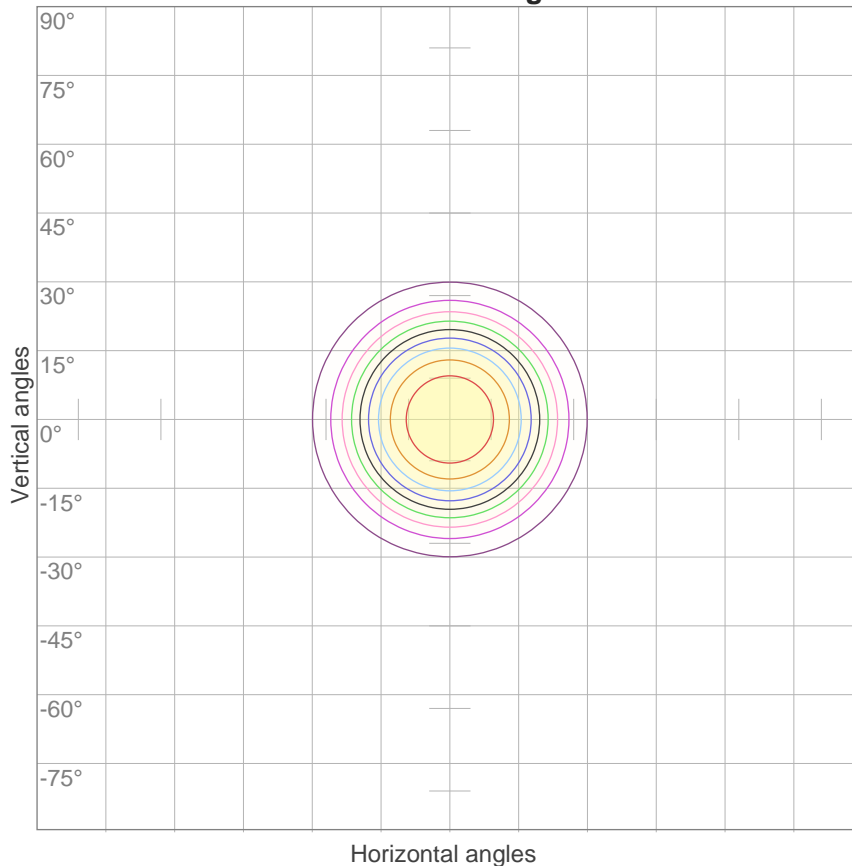


10%	435 cd
20%	870 cd
30%	1305 cd
40%	1740 cd
50%	2175 cd
60%	2610 cd
70%	3045 cd
80%	3480 cd
90%	3916 cd

Conditions:

Number of c-planes: 16

Candela at center: 4351 cd

ISO lux diagram

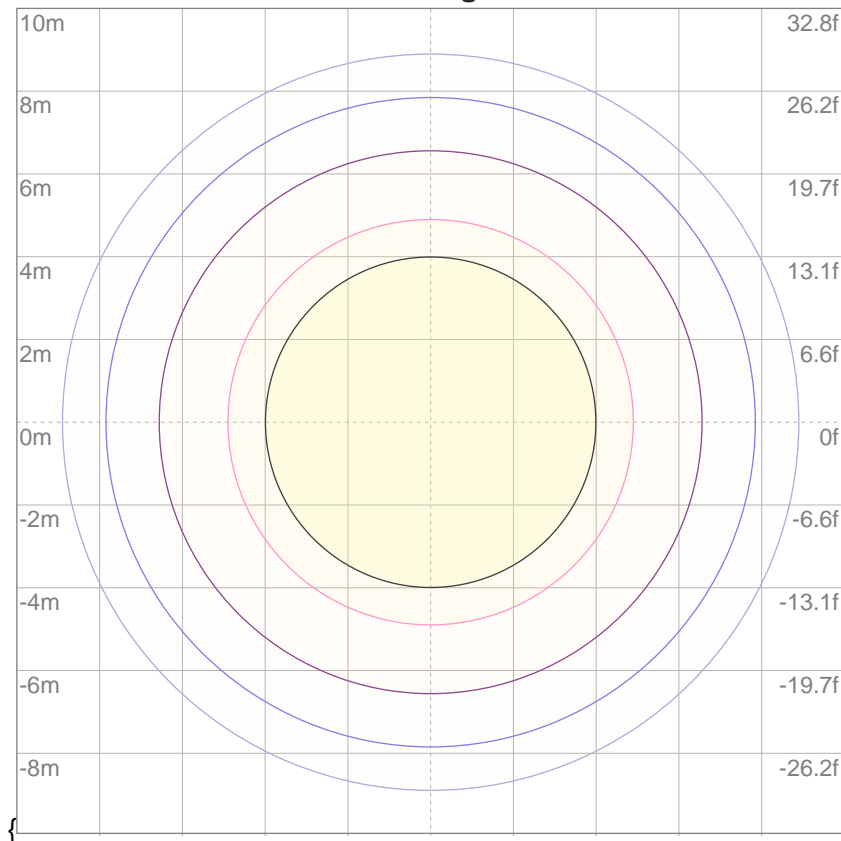

3%	131 lx
5%	218 lx
10%	435 lx
30%	1305 lx
50%	2175 lx

Conditions:

Number of c-planes: 16

Lux at center: 4351 lx

*Lux distribution on a surface when lamp is mounted at 1 meter from the surface.*

Mounting height: 1 Meters (3 Feet)