

VISUAL COMFORT & Co.

Light efficiency:


90 Lumen/Watt

Output: 1300 lm

Peak: 2380 cd

Power: 14.5 W

PF: 0.99

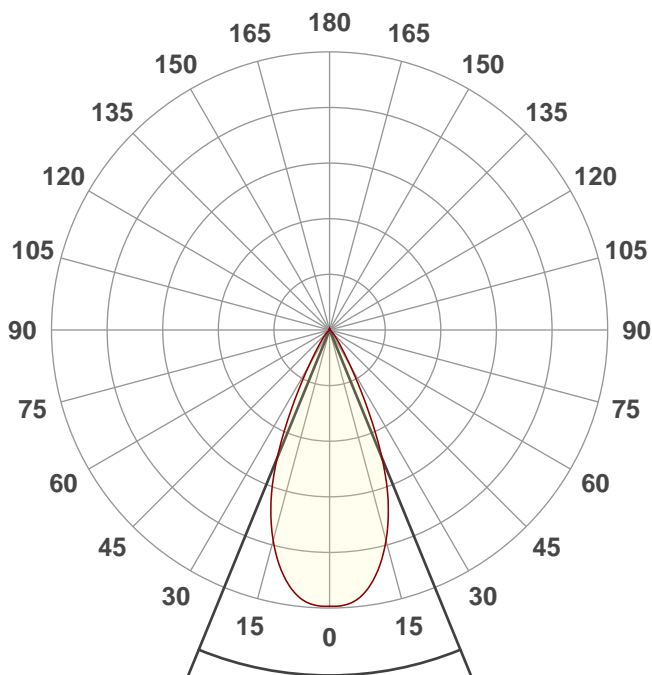

Product name:

TR1100 EC3RS-159WD314DN-UNV-W


Date and time:

3/28/2023 1:46:43 PM

44.5°

Beam angle

Power

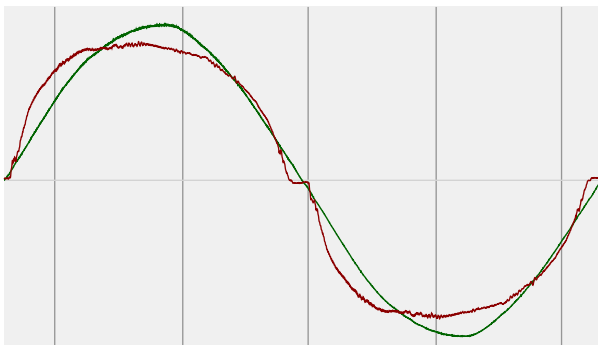


Voltage: 121 V

Current: 0.121 A

ISO Diagrams

ISO candela diagram

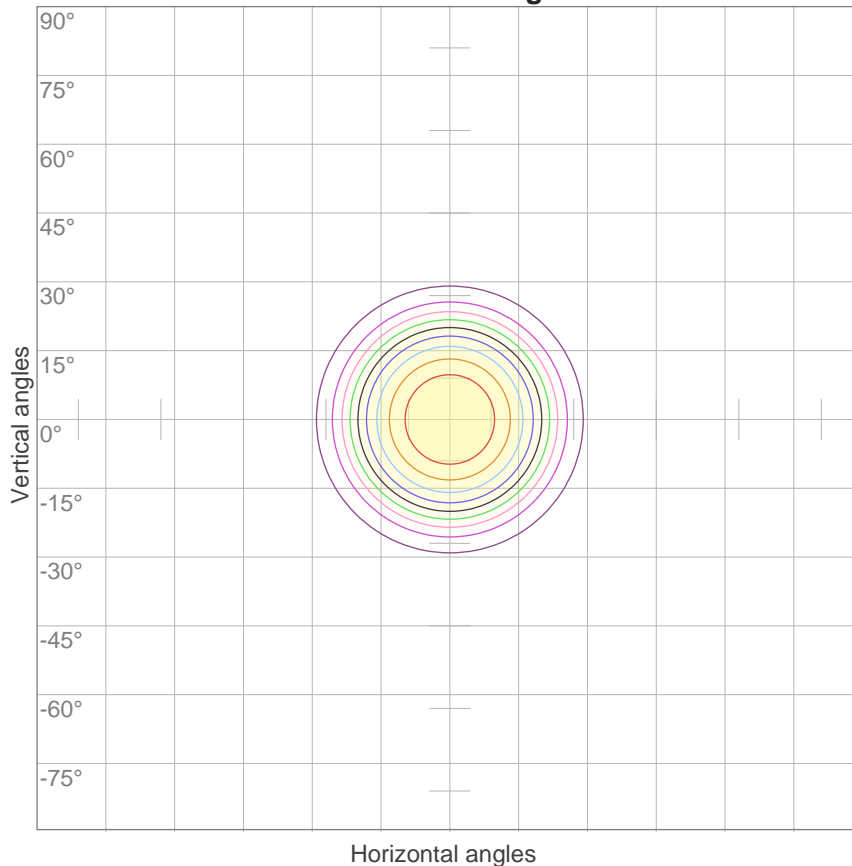


10%	238 cd
20%	476 cd
30%	714 cd
40%	952 cd
50%	1189 cd
60%	1427 cd
70%	1665 cd
80%	1903 cd
90%	2141 cd

Conditions:

Number of c-planes: 16

Candela at center: 2379 cd

ISO lux diagram

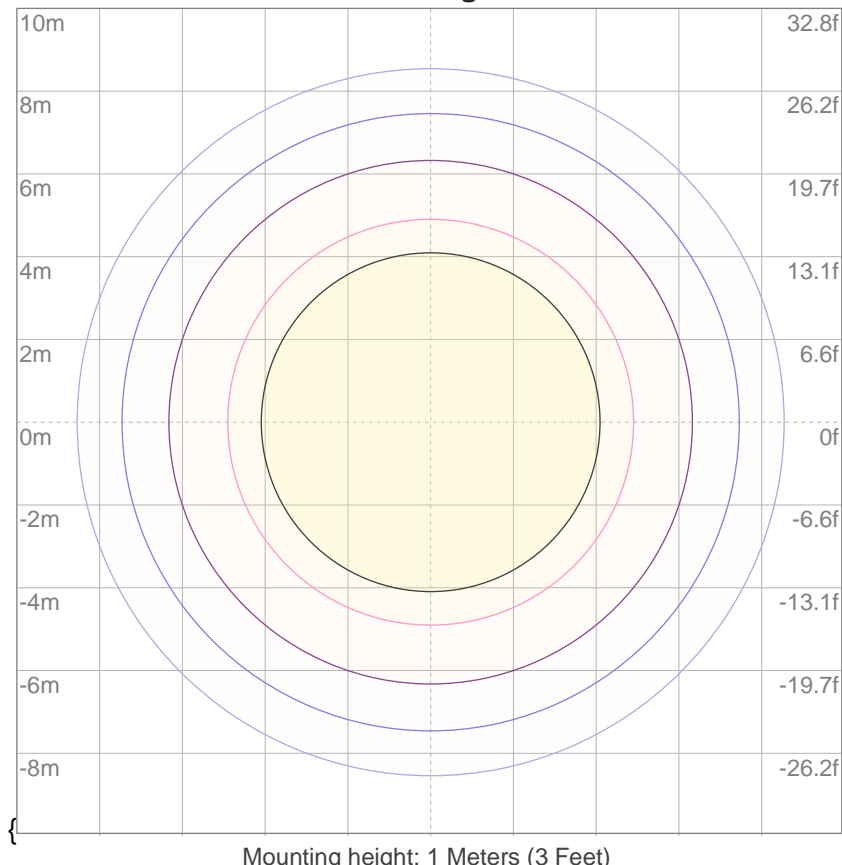

3%	71 lx
5%	119 lx
10%	238 lx
30%	714 lx
50%	1189 lx

Conditions:

Number of c-planes: 16

Lux at center: 2379 lx

Lux distribution on a surface when lamp is mounted at 1 meter from the surface.