

Light efficiency:

93 Lumen/Watt

Light quality:

CRI: 91.1

Color temperature:

3007 K

Output: 1803 lm

Peak: 2164 cd

Power: 19.3 W

PF: 0.99

No photo

Tracking number: [n/a](#)

Product name:


TR0606_L199304D_60

Item number:

Date and time:


6/11/2021 10:40:02 AM

Description:

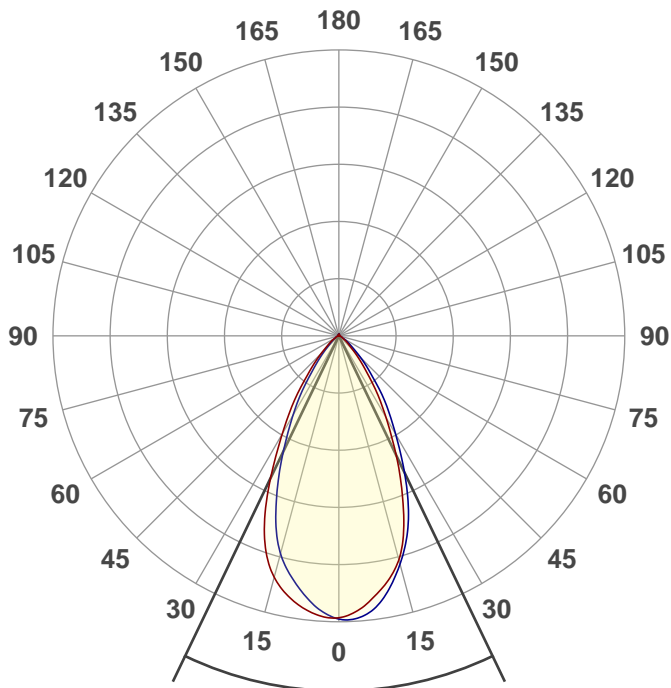




CIE 1931
x: 0.438
y: 0.406

Spectra

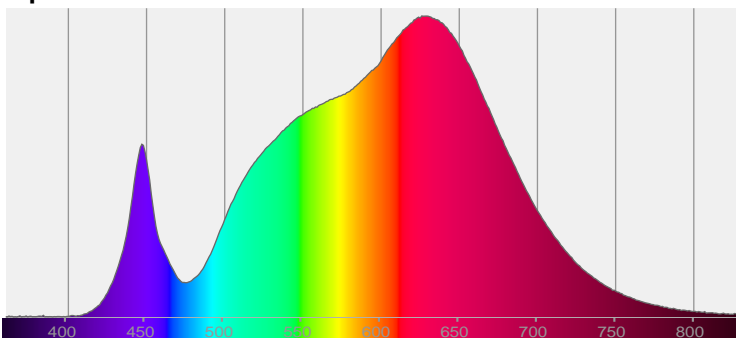


Power

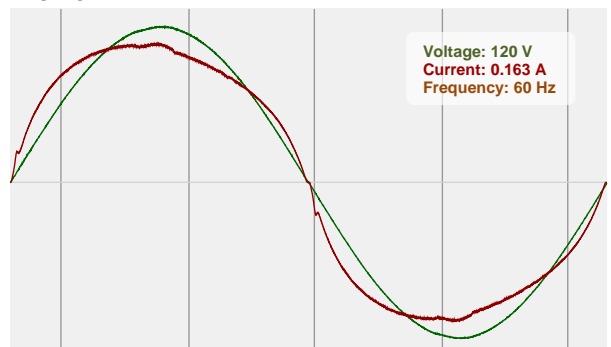


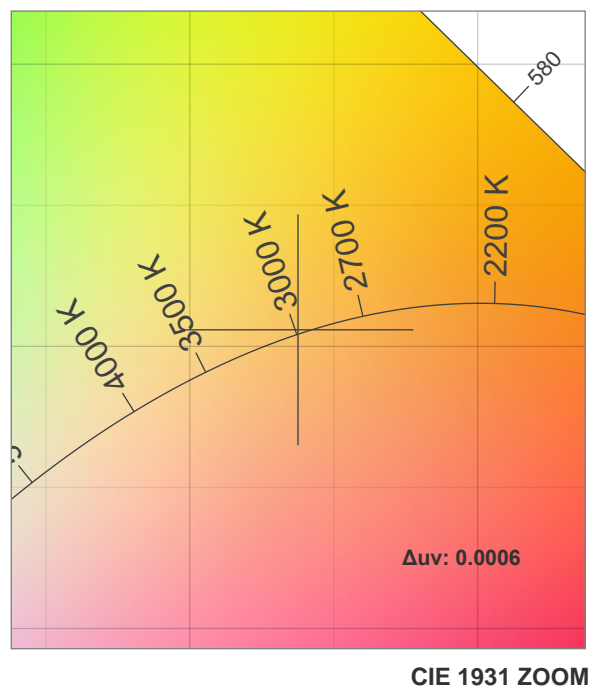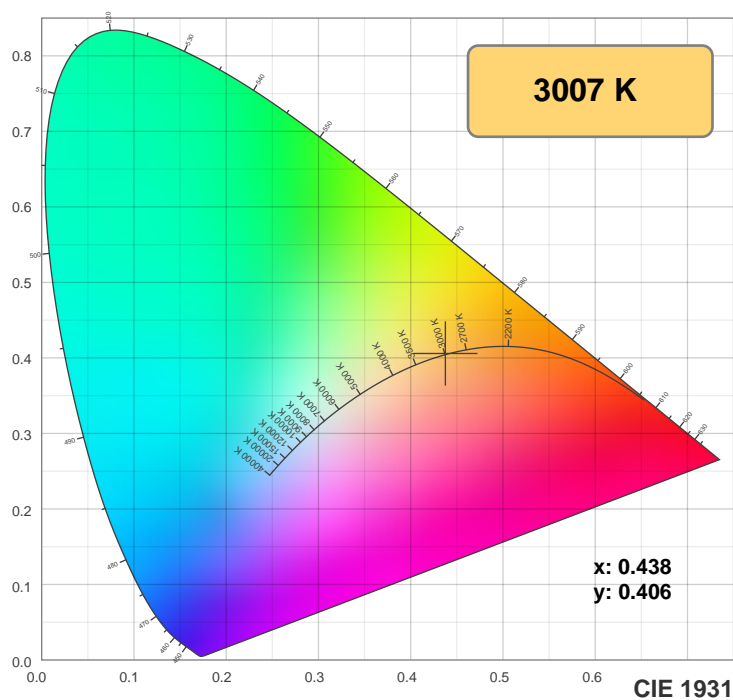

TM30: 88.7

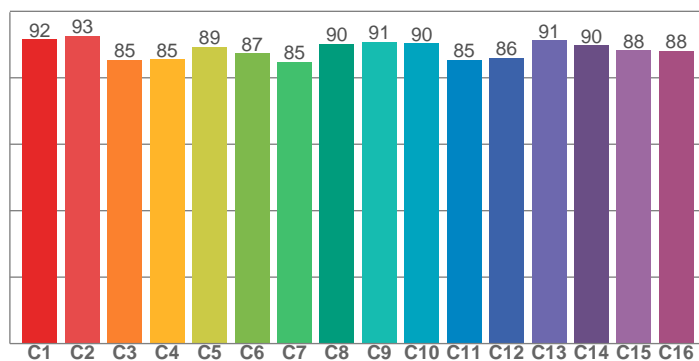

CRI: 91.1 (R1-R8)

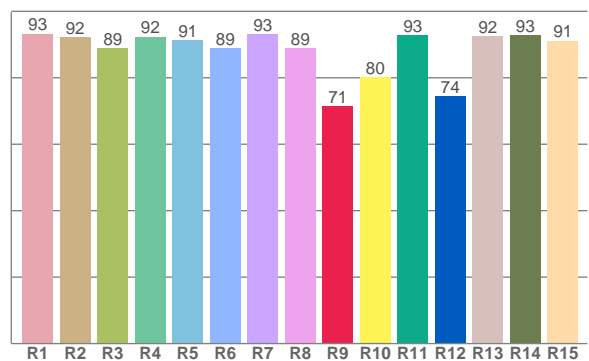

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.2	92.1	88.9	92.3	91.4	88.8	93.0	89.0	71.4	80.1	92.9	74.4	92.5	92.8	91.1


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91.5	92.7	85.4	85.5	89.3	87.3	84.8	90.2	90.8	90.4	85.5	86.0	91.3	89.8	88.2	88.2

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
87.5	96.7	84.1	86.7	87.4	83.5	84.8	92.1	94.5	89.7	91.2	92.7	93.9	89.6	88.5

CQS: 88.7

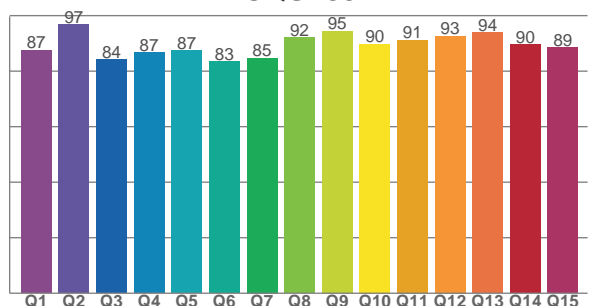

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3007 K	91.1	71.4	88.7	103.8	88.7	0.438	0.406	0.250	0.348	0.0006







Rf 88.7


Fidelity index Rf

Rg 103.8

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	92	-3%	-3%
2	93	-3%	2%
3	85	0%	8%
4	85	4%	8%
5	89	7%	6%
6	87	8%	0%
7	85	5%	-8%
8	90	1%	-6%
9	91	-3%	-5%
10	90	-5%	1%
11	85	-3%	9%
12	86	4%	7%
13	91	6%	2%
14	90	8%	-3%
15	88	4%	-6%
16	88	2%	-9%

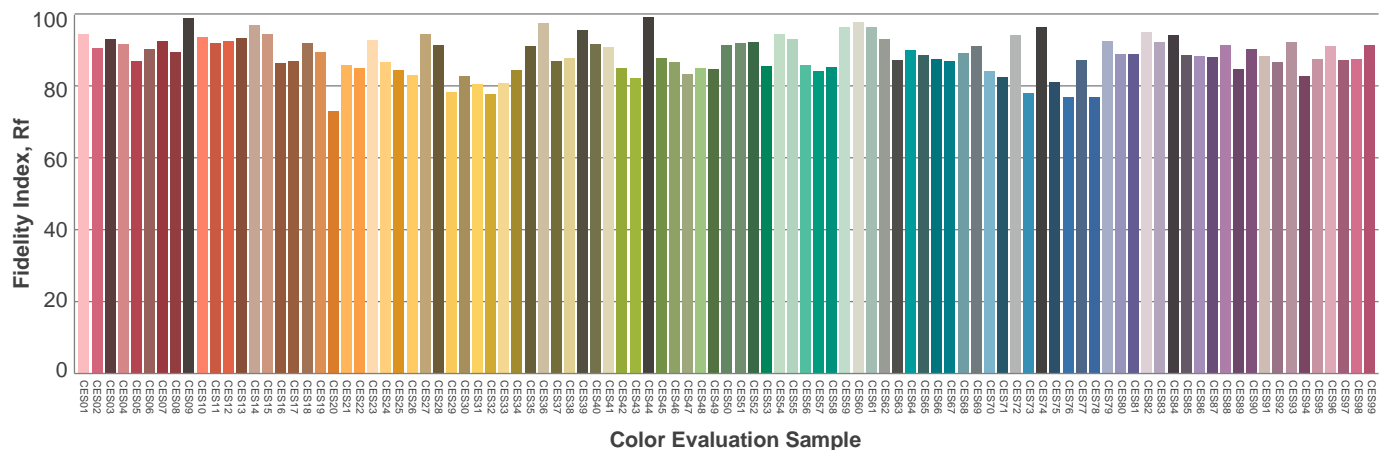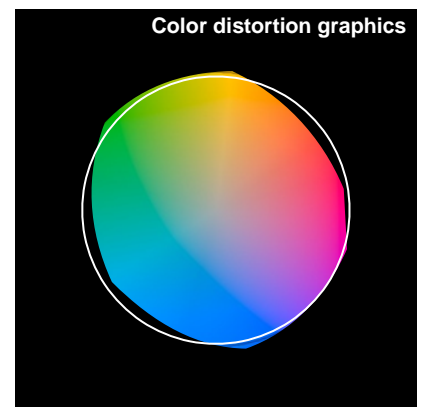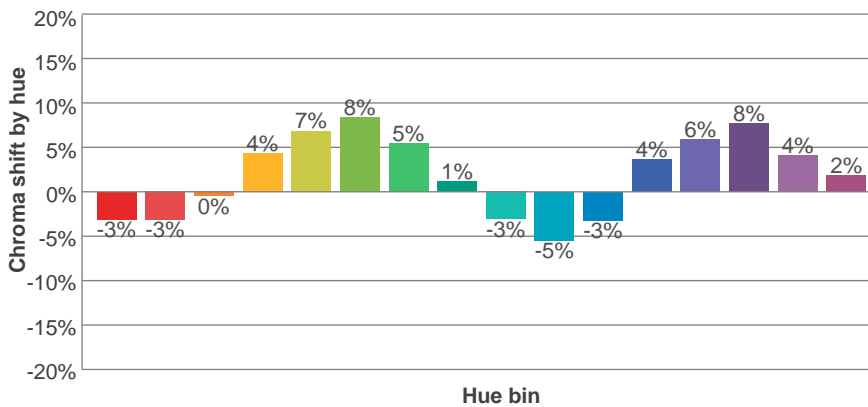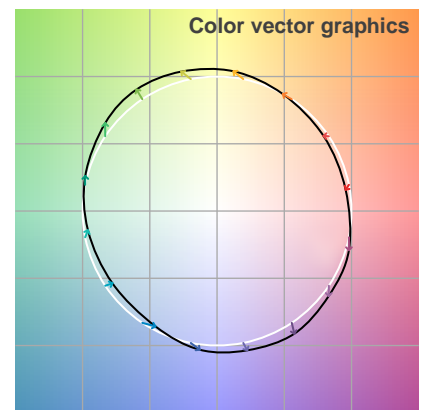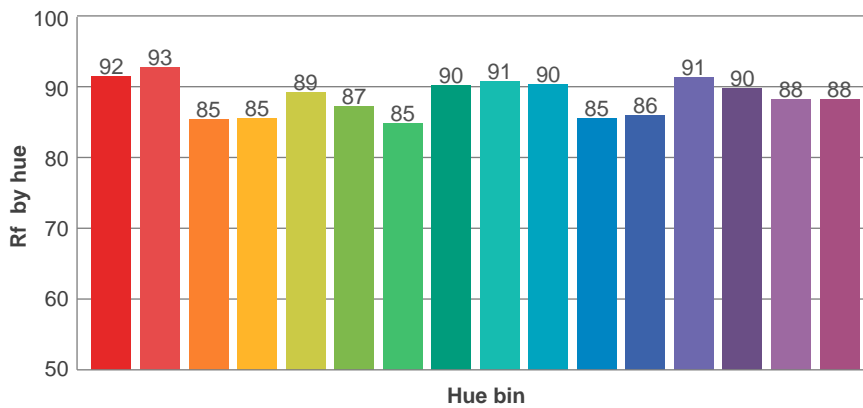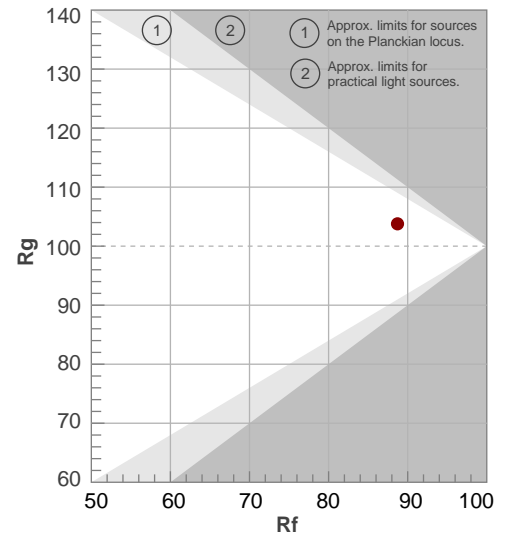

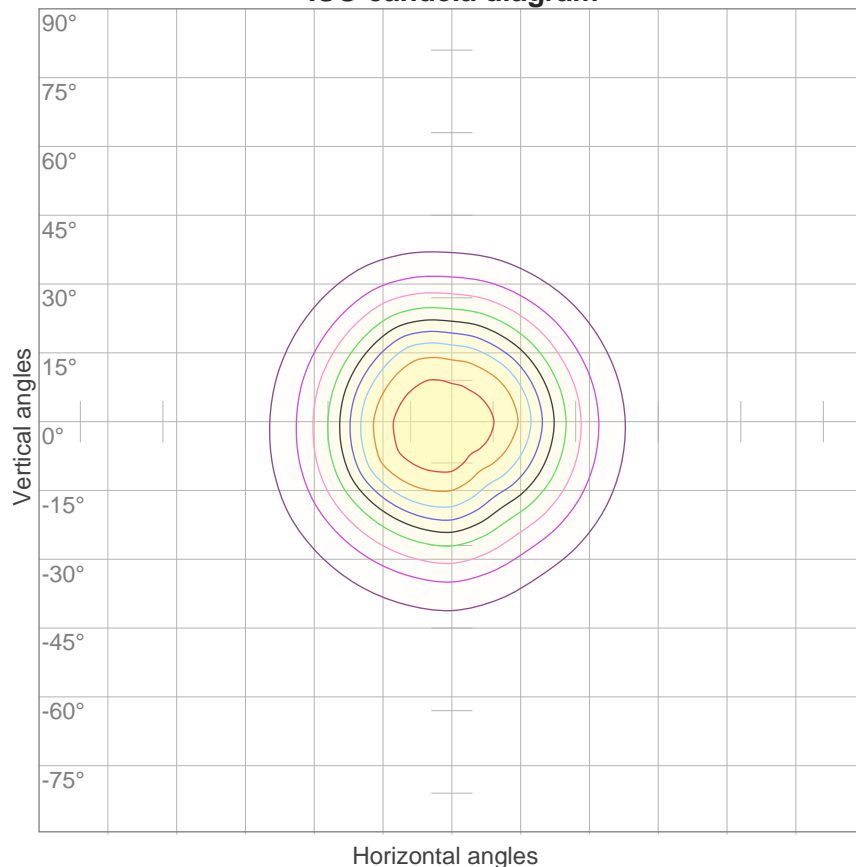
ISO candela diagram


10%	215 cd
20%	430 cd
30%	645 cd
40%	860 cd
50%	1075 cd
60%	1290 cd
70%	1505 cd
80%	1720 cd
90%	1935 cd

Conditions:

Number of c-planes: 12

Candela at center: 2150 cd

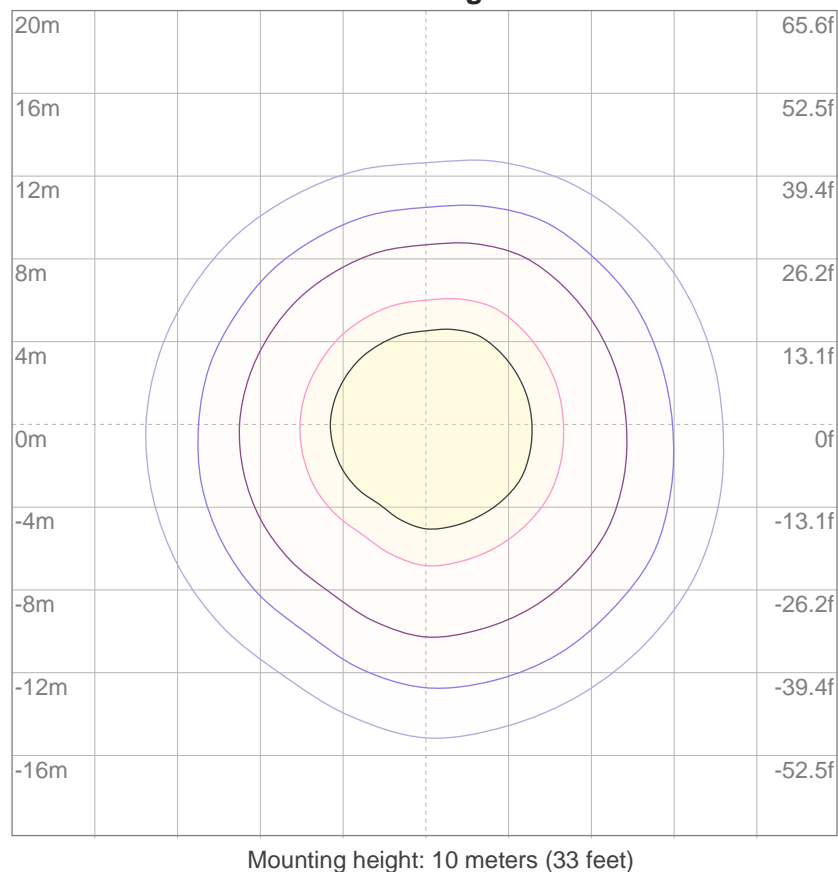ISO lux diagram


3%	0.645 lx
5%	1.08 lx
10%	2.15 lx
30%	6.45 lx
50%	10.8 lx

Conditions:


Number of c-planes: 12

Lux at center: 21.5 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*

Stabilization

Warmup curve

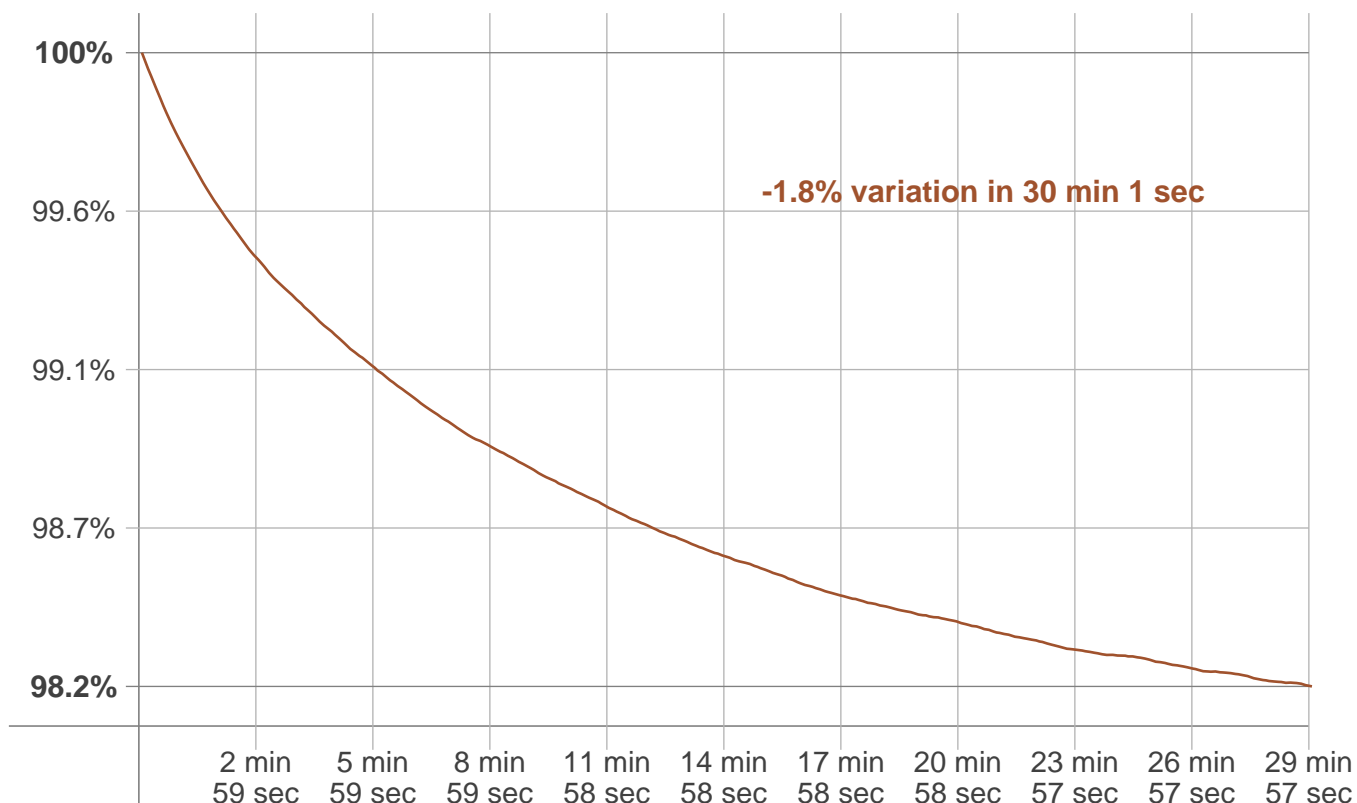

Warmup result

Warmup time:	30 min 1 sec
Warmup variation	-1.8%

Warmup conditions

Stable period:	15 min
Stable change max:	0.5%
Minimum time:	30 min

Color temperature change

CCT start	CCT change	CCT end
3015 K	-8 K	3007 K

Output change

Output start	Output change	Output end
1835 lm	-32 lm	1803 lm